

B72

DUAL GLASS MODULE | BIFACIAL CELLS

OEM production by Almaden Morocco

19.39%
EFFICIENCY*

345-380W
OUTPUT POWER

72
CELLS

*for 380W panel

MAIN PARAMETERS

23.3KG
WEIGHT

5MM
THICKNESS

1980 x 990MM
DIMENSIONS

KEY FEATURES



EXTENDED WARRANTY
12 years product warranty on workmanship & materials, 30 years warranty on linear power output.



PID FREE
Guaranteed free of PID (potential induced degradation).



ULTRA LIGHT & ULTRA THIN
No frame, no back sheet, 2mm thermally tempered glass exclusively used as front and back protection material.



EASY CLEANING
Frameless design, no dust trapped on the edge. The nano coating which is applied during the anti-reflection treatment process ensures a surface where dirt particles roll off.



FIRE RESISTANT
Class A fire protection. Glass-glass design helps to save module from damages caused by arc and hot spots, eliminating potential dangers of fire.



FREE OF MICRO CRACKS
Fully symmetrical structure to prevent micro cracks. No micro cracks under harsh transportation, complicated handling and installation conditions, and during lifetime of module operation.



OUTSTANDING PERFORMANCE
Certified to withstand high wind loads of 2400Pa and snow loads of 5400Pa.



INCREASED POWER GENERATION
Power generated on both sides, up to 30% yield increase.



LINEAR WARRANTY



PACKAGING CONFIGURATION

Modules per box	38 pieces
Modules per 20' container	380 pieces
Modules per 40' container	836 pieces

* Declaration:

The technical specifications in this document may be slightly biased and Almaden does not guarantee its complete accuracy. Due to continuous technological innovation and product optimization, Almaden reserves the right to adjust the specification in this document at any time without prior notice. When signing a contract, the client should obtain the latest product datasheet as part of a binding contract.



Version: AM-JAN-21

ELECTRICAL SPECIFICATION (STC)

Rated Power (Pmpp)	345 W	350 W	355 W	360 W	365 W	370 W	375 W	380 W
Power Output Tolerance (W)	0~+5							
Rated Current (Impp) (A)	9.07	9.13	9.19	9.25	9.3	9.39	9.48	9.57
Rated Voltage (Vmpp) (V)	38.05	38.34	38.63	38.92	39.25	39.41	39.57	39.73
Short Circuit Current (Isc) (A)	9.5	9.56	9.62	9.68	9.77	9.85	9.93	10.01
Open Circuit Voltage (Voc) (V)	47.66	47.72	47.78	47.84	47.94	48.01	48.08	48.15
Efficiency	17.60%	17.86%	18.11%	18.37%	18.62%	18.88%	19.13%	19.39%

BIFACIAL OUTPUT-REAR SIDE POWER GAIN


5%	Maximum Power (Pmax)	362 W	368 W	373 W	378 W	383 W	389 W	394 W	399 W
	Module Efficiency STC	18.48%	18.75%	19.02%	19.28%	19.55%	19.82%	20.09%	20.36%
15%	Maximum Power (Pmax)	397 W	403 W	408 W	414 W	420 W	426 W	431 W	437 W
	Module Efficiency STC	20.24%	20.53%	20.83%	21.12%	21.41%	21.71%	22.00%	22.29%
25%	Maximum Power (Pmax)	431 W	438 W	444 W	450 W	456 W	463 W	469 W	475 W
	Module Efficiency STC	22.00%	22.32%	22.64%	22.96%	23.28%	23.59%	23.91%	24.23%

ELECTRICAL DATA (NOCT)

Maximum Power (Pmax) (W)	258.68	262.05	265.42	268.79	272.2	276.03	279.86	283.69
Maximum Power Current (Imp) (A)	7.25	7.28	7.31	7.34	7.37	7.43	7.49	7.55
Maximum Power Voltage (Vm) (V)	35.79	36.07	36.35	36.63	36.91	37.15	37.39	37.63
Short Circuit Current (Isc) (A)	7.71	7.74	7.77	7.8	7.83	7.89	7.95	8.01
Open Circuit Voltage (Voc) (V)	44.18	44.31	44.44	44.57	44.7	44.79	44.88	44.97

NOCT : Irradiance at 800W/m², Ambient Temperature 20 , Wind Speed 1m/s.

I-V & P-V CURVE

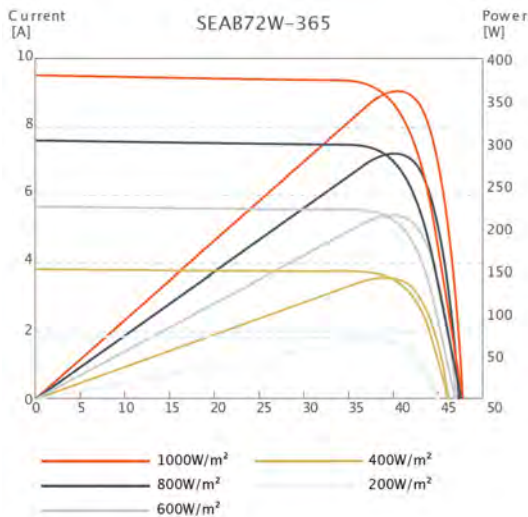

MECHANICAL SPECIFICATION

Cell Type	Bifacial cells
Cell Dimension (mm)	156.75 x 156.75
Module Dimension (mm)	1980±2 x 990±2 x 5 (without J-Box)
Weight Size	23.3kg
Front Glass	2mm thermally tempered AR glass
Encapsulant	POE
Back Glass	2mm thermally tempered glass
Junction box	IP68 (three bypass diodes)
Cable	4mm ²
Connector	MC4 / MC4 equivalent

TEMPERATURE COEFFICIENT

NOCT (Normal Operating Cell Temperature)	45±2°C
Temperature Coefficient of Isc (α)	0.06%/°C
Temperature Coefficient of Voc (β)	-0.3%/°C
Temperature Coefficient of Pmpp (γ)	-0.39%/°C

OPERATING CONDITIONS

Bifaciality*	70%±5%
Operational Temperature	-40~+85°C
Maximum Static Load	3600Pa
Maximum Wind Load	1600Pa
Maximum System Voltage	IEC:1000/1500V
Maximum Series Fuse Rating	20A

STC : Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5. *Bifaciality=Pmax,rear/Rated Pmax,front

DIMENSIONS

